


Service Conductor of Sufficient Length and Size To be Provided By Customer and Installed by Customer With Mountain Electric Employee present.

Service neutral and meter base must be Permanently grounded in accordance with NEC.


FRONT VIEW

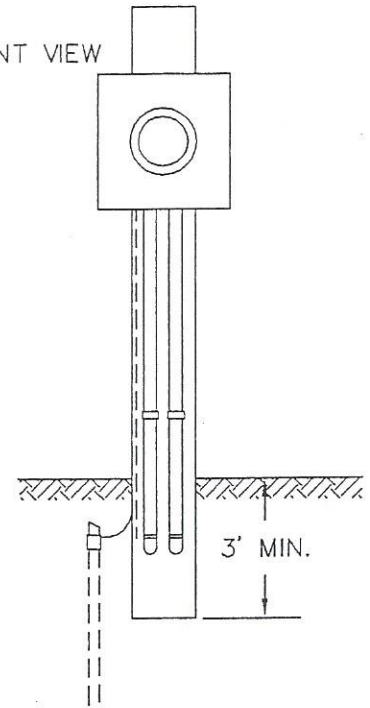

6" X 6" Pressure Treated Post

Meter Socket & Hub to be Furnished and Installed by Customer.

Meter to be Furnished and Installed by Mountain Electric

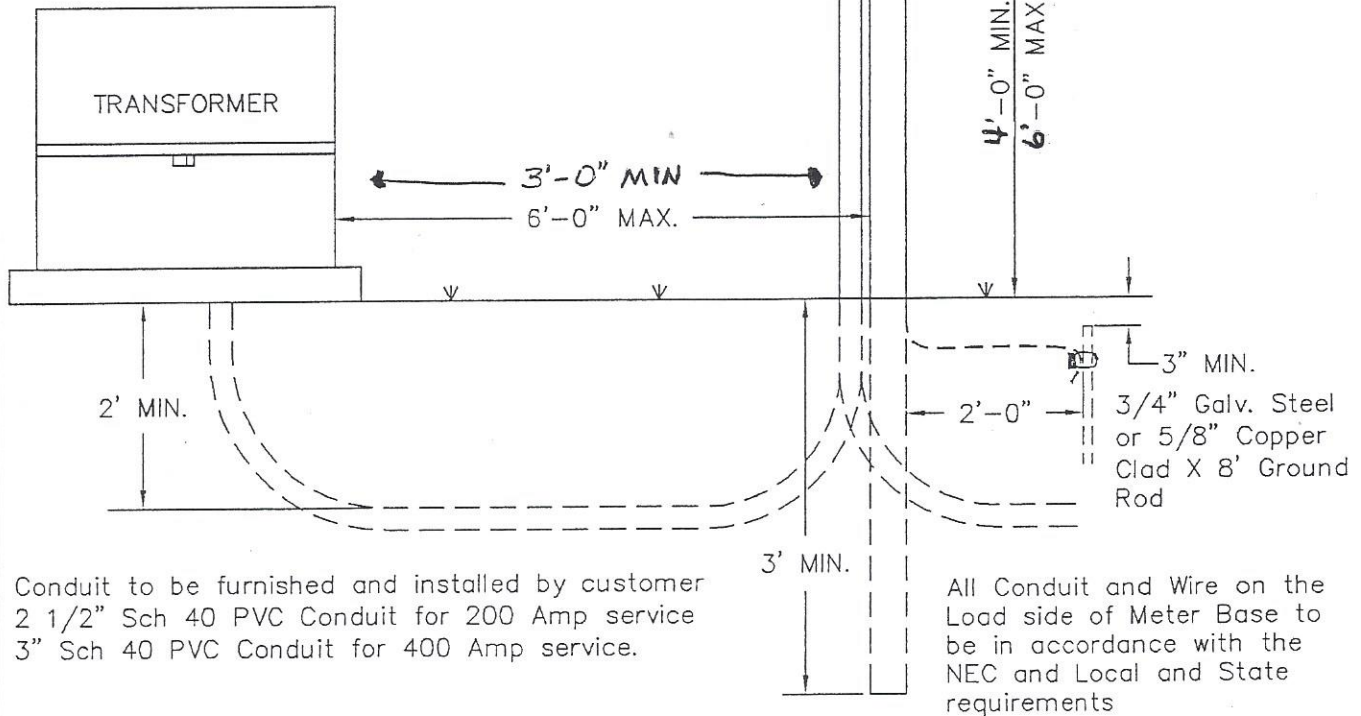

Conduit to be furnished and installed by customer  
 2 1/2" Sch 40 PVC Conduit for 200 Amp service  
 3" Sch 40 PVC Conduit for 400 Amp service.

All Conduit and Wire on the Load side of Meter Base to be in accordance with the NEC and Local and State requirements

MEC - CUSTOMER SERVICE GUIDE

DATE	RESIDENTIAL UNDERGROUND SINGLE PHASE SERVICE	DRAWING NO.
------	--	-------------